

# NEW UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
8733-294-00

Total pages in this submission  
45

## TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application  
Washington, DC 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 CFR 1.53(b) is a new utility patent application for an invention entitled:

METHOD AND APPARATUS FOR DRIVING LIQUID CRYSTAL DISPLAY PANEL IN  
INVERSION

and invented by:

Seung Kuk AHN

**IF A CONTINUATION APPLICATION**, check appropriate box and supply requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)

of prior application No.: \_\_\_\_\_

Prior application: Examiner: \_\_\_\_\_

Group Art: \_\_\_\_\_

### Enclosed are:

#### Application Elements

1. ☒ Filing fee as calculated and transmitted as described below.
2. ☒ Specification having 25 pages(s) and including the following:
  - a. ☒ Descriptive title of the invention
  - b. ☐ Cross references to related applications (if applicable)
  - c. ☐ Statement regarding Federally-sponsored research/development (if applicable)
  - d. ☐ Reference to microfiche appendix (if applicable)
  - e. ☒ Background of the invention
  - f. ☒ Brief summary of the invention
  - g. ☒ Brief description of the drawings (if drawings filed)
  - h. ☒ Detailed description
  - i. ☒ Claims as classified below
  - j. ☒ Abstract of the disclosure

**Application Elements (continued)**

3. ☒ Drawing(s) (when necessary as prescribed by 35 U.S.C. 113)  
☒ Formal ☐ Informal Number of sheets: 14
4. ☐ Oath or Declaration  
a. ☐ Newly executed (original or copy) ☐ Unexecuted  
b. ☐ Copy from a prior application (37 CFR 1.63(d) (for continuation/divisional applications only)  
c. ☐ With Power of Attorney ☐ Without Power of Attorney
5. ☐ Incorporation by reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is Supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer program in microfiche
7. ☐ Genetic sequence submission (if applicable, all must be included)  
a. ☐ Paper copy  
b. ☐ Computer-readable copy  
c. ☐ Statement verifying identical paper and computer readable copies

8. ☐ Assignment

**Accompanying Application**

9. ☐ Recordation Cover Sheet (PTO 1619)
10. ☐ 37 CFR 3.73(b) statement (when there is an assignee)
11. ☐ English translation document (if applicable)
12. ☐ Information Disclosure Statement (PTO 1449) ☐ Copies of IDS citations
13. ☐ Preliminary Amendment
14. ☒ Acknowledgment postcard
15. ☐ Certified copy of priority document(s) (if foreign priority is claimed)
16. ☐ Certificate of Mailing  
☐ First Class ☐ Express Mail (Label No.: \_\_\_\_\_ )
17. ☐ Small Entity statement(s) -- # submitted \_\_\_\_\_ (if Small Entity status claimed)

**Accompanying Application (continued)**

18. ☒ Additional enclosures (please identify below):

List of Inventors Names & Addresses  
Request for Priority


**Fee Calculation and Transmittal**

The filing fee for this utility patent application is calculated and transmitted as follows:

☒ Large Entity      ☐ Small Entity

<b><u>CLAIMS AS FILED</u></b>					
For	# Filed	# Allowed	# Extra	Rate	Fee
Total Claims	9	- 20 =		x \$18.00	
Independent Claims	2	- 3 =		x \$78.00	
Multiple Dependent Claims (check if applicable)				<input type="checkbox"/>	
Other Fees (specify purpose):					
BASIC FEE					\$690.00
TOTAL FILING FEE					\$690.00

- ☒ A check in the amount of \$690.00 to cover the total filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and Deposit Account No. 50-0911 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 CFR 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 CFR 1.18 at the mailing of the Notice of Allowance, pursuant To 37 CFR 1.31(b).

  
\_\_\_\_\_  
Song K. Jung  
Attorney Reg. No.: 35,210  
LONG ALDRIDGE & NORMAN LLP  
701 Pennsylvania Avenue N.W.  
Suite 600  
Washington, DC 20004  
(202) 624-1200

Dated: September 1, 2000

# METHOD AND APPARATUS FOR DRIVING LIQUID CRYSTAL PANEL IN INVERSION

5

## BACKGROUND OF THE INVENTION

### Field of the Invention

10 This invention relates to a technique for driving a liquid crystal display device, and more particularly to a liquid crystal panel driving method of driving a liquid crystal panel using an inversion system and an apparatus thereof.

### Description of the Prior Art

15

Generally, a liquid crystal display device controls the light transmissivity of liquid crystal cells in a liquid crystal panel to display a picture corresponding to a video signal. Such a liquid crystal display device uses a  
20 line-inversion system, a column-inversion system, a dot-inversion system and a group-inversion system, etc. so as to drive the liquid crystal cells in the liquid crystal panel. In a liquid crystal panel driving method of line-inversion system, as shown in Fig. 1A and Fig. 1B, the  
25 polarities of data signals applied to the liquid crystal panel are inverted in accordance with row lines, that is, gate lines on the liquid crystal panel and in accordance with frames. In a liquid crystal panel driving method of column-inversion system, as shown in Fig. 2A and Fig. 2B,  
30 the polarities of data signals applied to the liquid crystal panel are inverted in accordance with column

lines, that is, source lines on the liquid crystal panel and in accordance with frames. In a liquid crystal panel driving method of dot-inversion system, as shown in Fig. 3A and Fig. 3B, data signals having polarities contrary to the adjacent liquid crystal cells on the gate lines and to the adjacent liquid crystal cells on the data lines are applied to each liquid crystal cells in the liquid crystal panel, and the polarities of data signals applied to all liquid crystal cells in the liquid crystal panel are inverted every frame. In other words, in the dot-inversion system, data signals are applied to the liquid crystal cells in the liquid crystal panel in such a manner that the positive(+) polarity and the negative(-) polarity appear alternately as shown in Fig. 3A as it goes from the liquid crystal cell at the left upper end into the liquid crystal cells at the right side and into the liquid crystal cells at the lower side when a video signal in the odd-numbered frame is displayed; while data signals are applied to the liquid crystal cells in the liquid crystal panel in such a manner that the positive (+) polarity and the negative(-) polarity appear alternately as shown in Fig. 3B as it goes from the liquid crystal cell at the left upper end into the liquid crystal cells at the right side and into the liquid crystal cells at the lower side when a video signal in the even-numbered frame is displayed.

The line-inversion system in the above-mentioned liquid crystal panel driving method has a serious crosstalk in the horizontal direction. Particularly, when a picture alternated with two colors (i.e., a color with a medium

gray scale and a black color) depending on the line is displayed on the liquid crystal panel by the liquid crystal panel driving method of line inversion system, a serious flicker emerges between the horizontal lines. Similarly, when a picture alternated with two colors (i.e., a color with a medium gray scale and a black color) depending on the line is displayed on the liquid crystal panel by the liquid crystal panel driving method of column inversion system, a serious crosstalk in the vertical direction is generated. The dot-inversion system in which the polarities of the data signals are inverted in both the vertical and horizontal directions unlike the line-inversion system and the column inversion system provides better picture quality than the line- and column-inversion systems. Recently, owing to such an advantage, the liquid crystal panel driving method of dot-inversion system has been often used.

However, the liquid crystal panel driving method of dot-inversion system has a problem in that a brightness difference is generated at a boundary portion between column driver integrated circuits (IC'S). This generation of the brightness difference at the boundary portion between the column driver IC's is caused by an output deviation of the column driver IC's and a large difference in a voltage  $V_{gs}$  between the gate and the source of a thin film transistor (TFT) generated because the polarities of video signals applied to the liquid crystal cells at the boundary portion between the column driver IC's is opposed to each other.

The foregoing will be described in detail with reference to Fig. 4 to Fig. 6B. Each pixel on the liquid crystal panel can be expressed by an equivalent circuit as shown in Fig. 4. In Fig. 4, the pixel includes a TFT connected  
5 between a gate line GL and a data line DL, and a liquid crystal cell Clc connected between a source terminal of the TFT and a common voltage line CL. Further, the pixel includes a parasitic capacitor Cgs formed between the source terminal of the TFT and the gate line GL, and a  
10 parasitic resistor Rtft existing between the drain terminal and the source terminal of the TFT. The parasitic resistor Rtft is an equivalent resistance between the drain terminal and the source terminal when the TFT is turned off, which does not have a fixed value. The liquid  
15 crystal cell Clc charges a difference voltage between a video signal at the data line DL and a common voltage Vcom applied to the common voltage line CL until a time interval when the TFT maintains an ON state, that is, until a time interval when a gate high voltage Vgh is  
20 applied to the gate line GL. Accordingly, the difference voltage charged in the liquid crystal cell Clc becomes different depending on the polarity of the video signal and an output deviation of the column driver IC's.

25 Referring to Fig. 5A and Fig. 5B, there are shown a liquid crystal panel 10 having liquid crystal cells arranged in a matrix type, N column driver IC's 12 for individually applying a video signal to M data lines DL, and J gate  
driver IC's 14 for individually driving K gate lines GL.  
30 Herein, J, K, M and N are an integer. The N column driver IC's 12 apply video signals with a contrary polarity to

the adjacent data lines DL in such a manner to be synchronized with a time interval when the gate high voltage  $V_{gh}$  is sequentially applied to the gate lines GL by the J gate driver IC's 14. The pixels at the oblique-lined boundary portion positioned between the column driver IC's 12 are supplied with video signals having a polarity contrary to the video signals applied to the adjacent pixels. Voltages charged in the odd-numbered pixels  $P(J*(2I-1),M)$ ,  $P(J*(2I-1),2M)$ , ...,  $P(J*(2I-1),(N-1)*M)$  and  $P(J*(2I-1),M+1)$ ,  $P(J*(2I-1),2*M+1)$ , ...,  $P(J*(2I-1),(N-1)*M+1)$  in the data line direction of the pixels  $P(J*K,M)$ ,  $P(J*K,2M)$ , ...,  $P(J*K,(N-1)*M)$  connected to the left data lines DL and the pixels  $P(J*K,M+1)$ ,  $P(J*K,2*M+1)$ , ...,  $P(J*K,(N-1)*M+1)$  connected to the right data line DL at the boundary portions of the adjacent column driver IC's 12 in the odd-numbered frames as shown in Fig. 5A are represented by Fig. 6A and Fig. 6B, respectively. Herein, I is an integer. Fig. 6A represents a voltage  $V_{gs}$  between the gate and the source charged in the odd-numbered pixels  $P(J*(2I-1),M)$ ,  $P(J*(2I-1),2M)$ , ...,  $P(J*(2I-1),(N-1)*M)$  connected to the left data lines at the boundary portions between the column driver IC's 12, whereas Fig. 6B represents a voltage  $V_{gs}$  between the gate and the source charged in the odd-numbered pixels  $P(J*(2I-1),M+1)$ ,  $P(J*(2I-1),2*M+1)$ , ...,  $P(J*(2I-1),(N-1)*M+1)$  connected to the right data lines at the boundary portions between the column driver IC's 12 in the odd-numbered frames. As seen from Fig. 6A and Fig. 6B, the voltage  $V_{gs}$  between the gate and the source charged in the odd-numbered pixels  $P(J*(2I-1),M)$ ,  $P(J*(2I-1),2M)$ , ...,  $P(J*(2I-1),(N-1)*M)$  connected to the left data lines at



the boundary portions in the odd-numbered frames becomes much smaller than the voltage  $V_{gs}$  between the gate and the source charged in the odd-numbered pixels  $P(J*(2I-1), M+1)$ ,  $P(J*(2I-1), 2M+1)$ , ...,  $P(J*(2I-1), (N-1)*M+1)$  connected to  
 5 the right data lines at the boundary portions. A difference in the voltages  $V_{gs}$  between the gates and the sources charged in the adjacent pixels within the boundary portions emerges at the even-numbered pixels  $P(J*2I, M)$ ,  $P(J*2I, 2M)$ , ...,  $P(J*2I, (N-1)*M)$  and  $P(J*2I, M+1)$ ,  
 10  $P(J*2I, 2M+1)$ , ...,  $P(J*2I, (N-1)*M+1)$  in the data line direction in opposition to the odd-numbered pixels  $P(J*(2I-1), M)$ ,  $P(J*(2I-1), 2M)$ , ...,  $P(J*(2I-1), (N-1)*M)$  and  $P(J*(2I-1), M+1)$ ,  $P(J*(2I-1), 2M+1)$ , ...,  $P(J*(2I-1), (N-1)*M+1)$ , respectively. Accordingly, since a  
 15 brightness difference of the displayed picture becomes serious at the boundary portions between the column driver IC's 12, a noise pattern at the vertical line emerges on the field. Such a phenomenon becomes more serious as the output deviation of the column driver IC's 12 goes larger.  
 20 The video signal applied to each pixel cell in the even-numbered frames following the odd-numbered frames has a polarity contrary to that in the odd-numbered frames. In the even-numbered frames, a voltage  $V_{gs}$  between the gate and the source charged in the odd-numbered pixels  $P(J*(2I-1), M)$ ,  $P(J*(2I-1), 2M)$ , ...,  $P(J*(2I-1), (N-1)*M)$  connected  
 25 to the left data lines at the boundary portions between the column driver IC's 12 is as shown in Fig. 6B. On the other hand, a voltage  $V_{gs}$  between the gate and the source charged in the odd-numbered pixels  $P(J*(2I-1), M+1)$ ,  $P(J*(2I-1), 2M+1)$ , ...,  $P(J*(2I-1), (N-1)*M+1)$  connected to  
 30 the right data lines at the boundary portions between the

column driver IC's 12 is as shown in Fig. 6A. Accordingly,  
in the even-numbered frames, the voltage  $V_{gs}$  between the  
gate and the source charged in the odd-numbered pixels  
 $P(J*(2I-1),M)$ ,  $P(J*(2I-1),2M)$ , ...,  $P(J*(2I-1),(N-1)*M)$   
5 connected to the left data lines at the boundary portions  
becomes much smaller than the voltage  $V_{gs}$  between the gate  
and the source charged in the odd-numbered pixels  $P(J*(2I-1),M+1)$ ,  
 $P(J*(2I-1),2M+1)$ , ...,  $P(J*(2I-1),(N-1)*M+1)$   
connected to the right data lines at the boundary  
10 portions. In the even-numbered frames, a difference in the  
voltages charged in the even-numbered pixels  $P(J*2I,M)$ ,  
 $P(J*2I,2M)$ , ...,  $P(J*2I,(N-1)*M)$  and  $P(J*2I,M+1)$ ,  
 $P(J*2I,2M+1)$ , ...,  $P(J*2I,(N-1)*M+1)$  in the data line  
direction emerges in opposition to that in the odd-  
15 numbered pixels  $P(J*(2I-1),M)$ ,  $P(J*(2I-1),2M)$ , ...,  
 $P(J*(2I-1),(N-1)*M)$  and  $P(J*(2I-1),M+1)$ ,  $P(J*(2I-1),2M+1)$ ,  
...,  $P(J*(2I-1),(N-1)*M+1)$ , respectively.

Meanwhile, a large output deviation may be generated  
20 between the output terminals of the same column driver IC  
12. In this case, a large brightness difference is  
generated between the adjacent pixels in the data line  
direction of the pixel areas within the same column driver  
IC 12 in similarity to the above-mentioned phenomenon  
25 appearing at the boundary portions between the column  
driver IC's 12.

As a result, in the conventional dot-inversion system, a  
voltage difference and a current difference charged in the  
30 adjacent pixels in the data line direction becomes large,  
and a large brightness difference is generated between the

adjacent pixels in the data line direction due to an output deviation within the column driver IC 12 or an output deviation between the column driver IC's 12 which is more increased at a higher resolution.

5

#### SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide an inversion-system liquid crystal panel driving  
10 method and apparatus that is adaptive for reducing a brightness difference between adjacent pixels in the dot inversion system.

In order to achieve these and other objects of the  
15 invention, a method of driving a liquid crystal panel having pixels in an inversion system according to one aspect of the present invention includes the steps of setting at least one pixel block each of which includes at least two data lines within the liquid crystal panel;  
20 allowing the adjacent pixels in a gate line direction within the pixel block to respond to data signals having the same polarity; and allowing the pixels within the other pixel areas except for the pixel block to respond to data signals having a polarity contrary to the adjacent  
25 pixels at the left and right sides thereof.

An apparatus for driving a liquid crystal panel in an inversion system according to another aspect of the present invention includes first signal supplying means  
30 for setting at least one pixel block each of which includes at least two data lines within the liquid crystal

panel to apply data signals having the same polarity to the adjacent pixels in a gate line direction within the pixel block; and second signal supplying means for applying data signals having a polarity contrary to the adjacent pixels at the left and right sides thereof to the pixels within the other pixel areas except for the pixel block area.

#### BRIEF DESCRIPTION OF THE DRAWINGS

10

These and other objects of the invention will be apparent from the following detailed description of the embodiments of the present invention with reference to the accompanying drawings, in which:

15 Figs. 1A and 1B illustrate polarity patterns of data signals applied to liquid crystal cells in the liquid crystal panel by a liquid crystal panel driving method of line-inversion system;

Figs. 2A and 2B illustrate polarity patterns of data signals applied to liquid crystal cells in the liquid crystal panel by a liquid crystal panel driving method of column-inversion system;

25 Figs. 3A and 3B illustrate polarity patterns of data signals applied to liquid crystal cells in the liquid crystal panel by a liquid crystal panel driving method of dot-inversion system;

Fig. 4 is a view for explaining a voltage charged in the liquid crystal cell;

30 Figs. 5A and 5B represent a brightness difference in the data line direction in a conventional dot-inversion system;

Figs. 6A and 6B are waveform diagrams of a voltage charged in the liquid crystal cell in accordance with the polarity of a video signal;

Figs. 7A and 7B illustrate the polarity of a video signal applied to the liquid crystal panel of inversion system according to a first embodiment of the present invention;

Figs. 8A and 8B illustrate the polarity of a video signal applied to the liquid crystal panel of inversion system according to a second embodiment of the present invention;

Fig. 9 is a block diagram showing a configuration of a liquid crystal panel driving apparatus of inversion system according to an embodiment of the present invention;

Fig. 10 is waveform diagrams of an output signal from each part of the liquid crystal panel driving apparatus of inversion system shown in Fig. 9; and

Fig. 11 is a detailed circuit diagram of each inverter shown in Fig. 9.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to Fig. 7A and Fig. 7B, there is shown a method of driving a liquid crystal panel in inversion according to a first embodiment of the present invention that makes a line inversion of adjacent pixels at boundary portions of column driver IC's 22 and drives the other pixels in dot-inversion. N column driver IC's 22 apply video signals with a contrary polarity to adjacent data lines DL in such a manner to be synchronized with a time interval when a gate high voltage  $V_{gh}$  is applied to gate lines GL by J gate driver IC's 24. Also, the N column driver IC's 22 apply video signals with the same polarity to the data

lines DL included in the boundary portions in such a manner that the video signal with the same polarity is applied to the adjacent pixel cells in the gate line direction at the oblique-lined boundary portions. In the odd-numbered frames as shown in Fig. 7A, video signals with a positive polarity are applied to the odd-numbered pixels  $P(J*(2I-1),M)$ ,  $P(J*(2I-1),2M)$ , ...,  $P(J*(2I-1),(N-1)*M)$  and  $P(J*(2I-1),M+1)$ ,  $P(J*(2I-1),2*M+1)$ , ...,  $P(J*(2I-1),(N-1)*M+1)$  in the data line direction of the pixels  $P(J*K,M)$ ,  $P(J*K,2M)$ , ...,  $P(J*K,(N-1)*M)$  connected to the left data lines DL and the pixels  $P(J*K,M+1)$ ,  $P(J*K,2*M+1)$ , ...,  $P(J*K,(N-1)*M+1)$  connected to the right data line DL at the boundary portions of the adjacent column driver IC's 22. Also, video signals with a negative polarity are applied to the even-numbered pixels  $P(J*2I,M)$ ,  $P(J*2I,2M)$ , ...,  $P(J*2I,(N-1)*M)$  and  $P(J*2I,M+1)$ ,  $P(J*2I,2M+1)$ , ...,  $P(J*2I,(N-1)*M+1)$  in the data line direction of the pixels  $P(J*K,M)$ ,  $P(J*K,2M)$ , ...,  $P(J*K,(N-1)*M)$  and  $P(J*K,M+1)$ ,  $P(J*K,2*M+1)$ , ...,  $P(J*K,(N-1)*M+1)$  at the boundary portions. A voltage  $V_{gs}$  between the gate and the source charged in the odd-numbered pixels  $P(J*(2I-1),M)$ ,  $P(J*(2I-1),2M)$ , ...,  $P(J*(2I-1),(N-1)*M)$  and  $P(J*(2I-1),M+1)$ ,  $P(J*(2I-1),2*M+1)$ , ...,  $P(J*(2I-1),(N-1)*M+1)$  within the boundary portions in the data line direction is as shown in Fig. 6A. A voltage  $V_{gs}$  between the gate and the source charged in the even-numbered pixels  $P(J*2I,M)$ ,  $P(J*2I,2M)$ , ...,  $P(J*2I,(N-1)*M)$  and  $P(J*2I,M+1)$ ,  $P(J*2I,2M+1)$ , ...,  $P(J*2I,(N-1)*M+1)$  is as shown in Fig. 6B.

30

A video signal applied to each pixel cell in the even-

numbered frames as shown in Fig. 7B following the odd-  
 numbered frames has a polarity contrary to that in the  
 odd-numbered frames. In the even-numbered frames, the  
 boundary portions between the column driver IC's 22 are  
 5 driven in a line inversion system having a polarity  
 contrary to the previous odd-numbered frames. Video  
 signals with a negative polarity are applied to the odd-  
 numbered pixels  $P(J*(2I-1),M)$ ,  $P(J*(2I-1),2M)$ , ...,  
 $P(J*(2I-1),(N-1)*M)$  and  $P(J*(2I-1),M+1)$ ,  $P(J*(2I-$   
 10  $1),2*M+1)$ , ...,  $P(J*(2I-1),(N-1)*M+1)$  in the data line  
 direction of the pixels  $P(J*K,M)$ ,  $P(J*K,2M)$ , ...,  
 $P(J*K,(N-1)*M)$  connected to the left data lines DL and the  
 pixels  $P(J*K,M+1)$ ,  $P(J*K,2*M+1)$ , ...,  $P(J*K,(N-1)*M+1)$   
 connected to the right data line DL at the boundary  
 15 portions. Also, video signals with a positive polarity are  
 applied to the even-numbered pixels  $P(J*2I,M)$ ,  $P(J*2I,2M)$ ,  
 ...,  $P(J*2I,(N-1)*M)$  and  $P(J*2I,M+1)$ ,  $P(J*2I,2M+1)$ , ...,  
 $P(J*2I,(N-1)*M+1)$  in the data line direction of the pixels  
 $P(J*K,M)$ ,  $P(J*K,2M)$ , ...,  $P(J*K,(N-1)*M)$  and  $P(J*K,M+1)$ ,  
 20  $P(J*K,2*M+1)$ , ...,  $P(J*K,(N-1)*M+1)$  at the boundary  
 portions. A voltage  $V_{gs}$  between the gate and the source  
 charged in the odd-numbered pixels  $P(J*(2I-1),M)$ ,  $P(J*(2I-$   
 $1),2M)$ , ...,  $P(J*(2I-1),(N-1)*M)$  and  $P(J*(2I-1),M+1)$ ,  
 $P(J*(2I-1),2*M+1)$ , ...,  $P(J*(2I-1),(N-1)*M+1)$  within the  
 25 boundary portions in the data line direction is as shown  
 in Fig. 6B. A voltage  $V_{gs}$  between the gate and the source  
 charged in the even-numbered pixels  $P(J*2I,M)$ ,  $P(J*2I,2M)$ ,  
 ...,  $P(J*2I,(N-1)*M)$  and  $P(J*2I,M+1)$ ,  $P(J*2I,2M+1)$ , ...,  
 $P(J*2I,(N-1)*M+1)$  is as shown in Fig. 6A. At the other  
 30 portions of the liquid crystal panel 10 except for the  
 boundary portions, the adjacent pixels at the upper,

lower, left and right portions thereof are supplied with video signals having a polarity contrary to each other in such a manner to be opposed to the previous odd-numbered frames.

5

As a result, at the boundary portions between the column driver IC's 22, video signals having the same polarity are inverted and applied to the pixel cells in the gate line direction every frame, and video signals having a contrary polarity are applied to the adjacent pixel cells in the data line direction every frame. In other words, the boundary portions between the column driver IC's are driven in the line inversion system. On the other hand, the other portions of the liquid crystal panel 10 except for the boundary portions are driven in the dot inversion system because the adjacent pixels at the upper, lower, left and right portions thereof are supplied with video signals having a polarity contrary to each other.

Referring now to Fig. 8A and Fig. 8B, there is shown a method of driving a liquid crystal panel in inversion according to a second embodiment of the present invention wherein pixels connected to a plurality of data lines DL to each of which a video signal is applied from a first column driver IC 32 are driven in the line-inversion system while the other pixels are driven in the dot-inversion system. The first column driver IC 32 applies the same polarity of video signal to the pixel cells in the gate line direction connected to the second to fourth data lines DL when output signals generated from the output terminals connected to the second to fourth data



lines DL of its output terminals have a large deviation.

In the odd-numbered frames as shown in Fig. 8A, a negative polarity of video signal is applied to the odd-numbered pixels  $P(J*(2I-1),2)$ ,  $P(J*(2I-1),3)$ ,  $P(J*(2I-1),4)$  in the data line direction of the pixels  $P(J*K,2)$ ,  $P(J*K,3)$ ,  $P(J*K,4)$  connected to the data lines DL at the oblique-lined area within the adjacent first column driver IC 32. Also, a positive polarity of video signal is applied to the even-numbered pixels  $P(J*2I,2)$ ,  $P(J*2I,3)$ ,  $P(J*2I,4)$  in the data line direction of the pixels  $P(J*K,2)$ ,  $P(J*K,3)$ ,  $P(J*K,4)$  connected to the data lines DL at the oblique-lined area. Accordingly, the odd-numbered pixels  $P(J*(2I-1),2)$ ,  $P(J*(2I-1),3)$ ,  $P(J*(2I-1),4)$  are charged by a voltage  $V_{gs}$  between the gate and the source as shown in Fig. 6B, whereas the even-numbered pixels  $P(J*2I,2)$ ,  $P(J*2I,3)$ ,  $P(J*2I,4)$  are charged by a voltage  $V_{gs}$  between the gate and the source as shown in Fig. 6A.

The video signal applied to each pixel cell in the even-numbered frames as shown in Fig. 8B following the odd-numbered frames has a polarity contrary to that in the odd-numbered frames. In the even-numbered frames, the oblique-lined area within the first column driver IC 32 is driven in the line-inversion system having a polarity contrary to the odd-numbered frames. A positive polarity of video signal is applied to the odd-numbered pixels in the data line direction of the pixels  $P(J*K,2)$ ,  $P(J*K,3)$ ,  $P(J*K,4)$  connected to the data lines DL at the oblique-lined area. Also, a negative polarity of video signal is applied to the even-numbered pixels in the data line

direction of the pixels  $P(J \cdot K, 2)$ ,  $P(J \cdot K, 3)$ ,  $P(J \cdot K, 4)$  connected to the data lines DL at the oblique-lined area. Accordingly, the odd-numbered pixels  $P(J \cdot (2I - 1), 2)$ ,  $P(J \cdot (2I - 1), 3)$ ,  $P(J \cdot (2I - 1), 4)$  are charged by a voltage  $V_{gs}$  between the gate and the source as shown in Fig. 6A, whereas the even-numbered pixels  $P(J \cdot 2I, 2)$ ,  $P(J \cdot 2I, 3)$ ,  $P(J \cdot 2I, 4)$  are charged by a voltage  $V_{gs}$  between the gate and the source as shown in Fig. 6B.

10 As a result, the pixel cells in the gate line direction included in a partial area within the first column driver IC 32 are supplied with the same polarity of video signals, whereas the pixel cells in the data line direction are supplied with the opposite polarity of video  
15 signals. In other words, the partial area within the first column driver IC 32 is driven in the line-inversion system. Although the embodiment has illustrated the case where the output signals generated from the output terminals connected to the second to fourth data lines DL  
20 of the output terminals of the first column driver IC 32 have a large deviation, the pixel cells in the gate line direction included in the corresponding area in accordance with the output deviation may be driven in the line-inversion system at any column driver IC's 32. Also, the  
25 areas driven in the line-inversion system is not limited to the partial data line area, but may be an area including a plurality of data lines, for example, an area including four or eight data lines. At an area other than the area driven in the line-inversion system, the adjacent  
30 pixels at the upper, lower, left and right side of the corresponding area are supplied with the opposite polarity

of video signals to be driven in the dot-inversion system.

Fig. 9 shows a liquid crystal display driving apparatus employing an inversion system according to the present invention. Fig. 10 is waveform diagrams of output signals and control signals of each part of the liquid crystal display driving apparatus shown in Fig. 9.

Referring to Fig. 9 and Fig. 10, the liquid crystal display driving apparatus includes a first counter 52 and a toggle flip-flop (T-FF) 54 for generating a dot-inversion control signal DPOL, a second counter 56 for generating a line-inversion control signal LPOL, and inverters INV1 to INVN for inverting the polarity of a video signal applied to each column pixel line PL1 to PLN in the dot-inversion system or in the line inversion system in accordance with the dot-inversion control signal DPOL or the line-inversion control signal LPOL. The counter 52 is initialized in a blanking interval of a data enable signal Denable as shown in Fig. 10 and performs a count operation by a dot clock signal DotClk applied to its clock terminal CLK in a data interval. The counter 52 makes a repetitive count operation until a certain integer by the dot clock signal DotClk to output a rectangular wave signal in which the dot clock signal DotClk is frequency-divided by a certain integer. This rectangular wave signal outputted from the counter 52 is inputted, via a buffer 58 and an inverter 59, to a multiplexor (MUX) 60. The T-FF 54 toggles a vertical synchronizing signal Vsync inputted thereto to generate a pulse signal every frame. The pulse signal outputted from the T-FF 54 is applied to

a control terminal of the MUX 60. Thus, the MUX 60 selects a rectangular wave signal from the counter 52 phase-inverted by means of the inverter 59 as the dot-inversion control signal DPOL in the odd-numbered frame or in the even-numbered frame. In other words, a phase of the dot-inversion control signal DPOL is inverted every frame. This dot-inversion control signal DPOL is commonly applied to the inverters INV1 to INVN by switching of first and second switches SW1 and SW2. The second counter 56 is initialized in the blanking interval of the data enable signal Denable and performs a count operation by the dot clock signal DotClk applied to its clock terminal CLK. Two output signals Vo1 and Vo2 of the second counter 56 have a phase difference depending on the counted number. The two output signals Vo1 and Vo2 of the second counter 56 may have a phase difference corresponding to 8 dot clock signals DotClk. The second output signal Vo2 of the output signals having such a phase difference is phase-inverted and inputted to an AND gate 61. The AND gate 61 makes a logical product operation of the first output signal Vo1 from the second counter 56 and the inverted second output signal  $\overline{\text{Vo2}}$  to generate the line-inversion control signal LPOL. Thus, the line-inversion control signal LPOL remains at a high logic from the rising edge of the first output signal Vo1 until the rising edge of the second output signal Vo2 when the two output signals Vo1 and Vo2 have a phase difference corresponding to 8 dot clock signals DotClk as shown in Fig. 10. At this time, a high logic interval of the line-inversion control signal LPOL has a width corresponding to 8 dot clock signals DotClk. Such a line-inversion control signal LPOL is applied to control

terminals of the first and second switches SW1 and SW2. The first switch SW1 applies the dot-inversion control signal DPOL to the inverters INV1 to INVN when the line-inversion control signal LPOL remains at a high logic, whereas the second switch SW2 applies the dot-inversion control signal DPOL to the inverters INV1 to INVN when the line-inversion control signal LPOL remains at a low logic. If a high logic of line-inversion control signal LPOL is sampled and applied, only the odd-numbered inverters INV1, INV3, ..., INVN-1 (wherein N is an even number) or the even-numbered inverters INV2, INV4, ..., INVN of the inverters INV1 to INVN invert an input video data. On the other hand, the adjacent inverters to which a low logic of line-inversion control signal LPOL is sampled and applied invert an input video data at the same time. More specifically, if the line-inversion control signal LPOL is applied to the inverters INV1 to INVN as shown in Fig. 10, then the inverters INV8 to INV16 connected to the eighth to sixteenth column pixel lines PL8 to PL16 for 8 lines phase-invert an input video data at the same time. Each output signal of the inverters INV1 to INVN is applied, via a digital-to-analog (DA) converter and an output circuit (not shown), to the data line DL.

Fig. 11 is a detailed circuit diagram of each inverter shown in Fig. 9. Referring to Fig. 11, each of the inverters INV1 to INVN includes a first buffer 71 or 72 and a first inverter 73 or 74 for receiving a video data via a first node n1, a first MUX 75 or 76 for outputting any one of output signals of the first buffer 71 or 72 and the first inverter 73 or 74, a second buffer 77 or 80 and

a second inverter 78 or 79 for receiving a video data via the first node n1, a second MUX 81 or 82 for outputting any one of output signals of the second buffer 77 or 80 and the second inverter 78 or 79, and a third MUX 83 or 84 for responding to the line-inversion control signal LPOL to output any one of an output signal of the first MUX 75 or 76 and an output signal of the second MUX 81 or 82. The dot-inversion control signal DPOL is commonly applied, via the second switch SW2, to the control terminals of the first MUX 75 in the odd-numbered inverter INV\_Odd and the first MUX 76 in the even-numbered inverter INV\_Even. The dot-inversion control signal DPOL is commonly applied, via the first switch SW1, to the control terminals of the second MUX 81 in the odd-numbered inverter INV\_Odd and the second MUX 82 in the even-numbered inverter INV\_Even. The line-inversion control signal LPOL controls the first and second switches SW1 and SW2, the third MUX 83 in the odd-numbered inverter INV\_Odd and the third MUX 84 in the even-numbered inverter INV\_Even simultaneously.

When the line-inversion control signal LPOL has a high logic, the first switch SW1 is turned on while the second switch SW2 is turned off. In this case, the second MUX 81 in the odd-numbered inverter INV\_Odd applies odd-numbered data phase-inverted by means of the second inverter 79 to the third MUX 83, whereas the second MUX 82 in the even-numbered inverter INV\_Even applies even-numbered data supplied with a phase being maintained via the second buffer 80 to the third MUX 84. The third MUX 83 in the even-numbered inverter INV\_Odd outputs the phase-inverted odd-numbered data from the second MUX 81 to the DA

converter, whereas the third MUX 84 in the even-numbered inverter INV\_Even outputs the phase-non-inverted even-numbered data from the second MUX 82 to the DA converter.

5 When the line-inversion control signal LPOL has a low logic, the first switch SW1 is turned off while the second switch SW2 is turned on. In this case, the first MUX 75 in the odd-numbered inverter INV\_Odd applies odd-numbered data phase-inverted by means of the first inverter 73 to  
10 the third MUX 83, whereas the first MUX 76 in the even-numbered inverter INV\_Even applies the phase-inverted even-numbered data, via the first inverter 74 to the third MUX 84. The third MUX 83 in the even-numbered inverter INV\_Odd outputs the phase-inverted odd-numbered data from  
15 the first MUX 75 to the DA converter, whereas the third MUX 84 in the even-numbered inverter INV\_Even outputs the phase-inverted even-numbered data from the first MUX 76 to the DA converter.

20 Accordingly, only any one of the odd-numbered inverter INV\_Odd and the even-numbered inverter INV\_Even inverts an input video data in the case of being driven in the dot-inversion system, whereas both the odd-numbered inverter INV\_Odd and the even-numbered inverter INV\_Even inverts an  
25 input video data at the same time.

As described above, according to the present invention, the polarities of video signals applied to the column pixel lines having a brightness difference is identically  
30 made, thereby equally maintaining a voltage  $V_{gs}$  between the gate and the source charged in the pixels.

Accordingly, a current amount charged in the adjacent pixels having a large brightness difference is supplied always equally, so that the brightness difference between the adjacent pixels can be reduced to eliminate a noise  
5 pattern in the vertical direction. Furthermore, a throughput and a picture quality can be improved.

Although the present invention has been explained by the embodiments shown in the drawings described above, it  
10 should be understood to the ordinary skilled person in the art that the invention is not limited to the embodiments, but rather that various changes or modifications thereof are possible without departing from the spirit of the invention. Accordingly, the scope of the invention shall  
15 be determined only by the appended claims and their equivalents.



What is claimed is:

1. A method of driving a liquid crystal panel having pixels arranged at each intersection between gate lines  
5 and data lines in a matrix type in an inversion system, comprising the steps of:

setting at least one pixel block each of which includes at least two data lines within the liquid crystal panel;

10 allowing the adjacent pixels in a gate line direction within the pixel block to respond to data signals having the same polarity; and

allowing the pixels within the other pixel areas except for the pixel block to respond to data signals  
15 having a polarity contrary to the adjacent pixels at the left and right sides thereof.

2. The method as claimed in claim 1, wherein the pixel block is positioned at a boundary portion between column  
20 drivers.

3. The method as claimed in claim 1, wherein the pixel block includes at least two data lines to which a data is applied from the same column driver.

25

4. The method as claimed in claim 1, wherein all the pixels within the liquid crystal panel responds to the data signals having a polarity inverted every frame.

30 5. An apparatus for driving a liquid crystal panel having pixels arranged at each intersection between gate lines

and data lines in a matrix type in an inversion system,  
comprising:

first signal supplying means for setting at least one  
pixel block each of which includes at least two data lines  
5 within the liquid crystal panel to apply data signals  
having the same polarity to the adjacent pixels in a gate  
line direction within the pixel block; and

second signal supplying means for applying data  
signals having a polarity contrary to the adjacent pixels  
10 at the left and right sides thereof to the pixels within  
the other pixel areas except for the pixel block area.

6. The apparatus as claimed in claim 5, further  
comprising:

15 line-inversion control means for controlling the  
first signal supplying means to apply the data signals  
having the same polarity to the adjacent pixels in the  
gate line direction; and

dot-inversion control means for controlling the  
20 second signal supplying means to apply the data signals  
having a polarity contrary to the adjacent pixels at the  
left and right sides thereof.

7. The apparatus as claimed in claim 5, wherein the first  
25 and second signal supplying means comprises:

at least two signal inverters for responding to  
control signals applied from the line-inversion control  
means and the dot-inversion control means to invert phases  
of input data signals.

30

8. The apparatus as claimed in claim 7, wherein all of the

odd-numbered signal inverters supplied with odd-numbered data signals and the even-numbered signal inverters supplied with even-numbered data signals respond to the control signal from the line-inversion control means to invert the input data signals.

9. The apparatus as claimed in claim 7, wherein any one of the odd-numbered signal inverters supplied with odd-numbered data signals and the even-numbered signal inverters supplied with even-numbered data signals respond to the control signal from the line-inversion control means to invert the input data signals.

## Abstract

A method and apparatus for driving a liquid crystal panel in a line-inversion system is disclosed. In the method, at least one pixel block each of which includes at least two data lines within the liquid crystal panel is set. The adjacent pixels in a gate line direction within the pixel block respond to data signals having the same polarity. The pixels within the other pixel areas except for the pixel block respond to data signals having a polarity contrary to the adjacent pixels at the left and right sides thereof. Accordingly, a current amount charged in the adjacent pixels having a large brightness difference is supplied always equally, so that the brightness difference between the adjacent pixels can be reduced to eliminate a noise pattern in the vertical direction.

2000-SEP-01 21:11 FROM:Y.H.KIM IPTL

FIG.1A  
PRIOR ART

+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-

FIG.1B  
PRIOR ART

-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+
-	-	-	-	-	-	-	-
+	+	+	+	+	+	+	+

[illegible]

FIG. 3A  
PRIOR ART

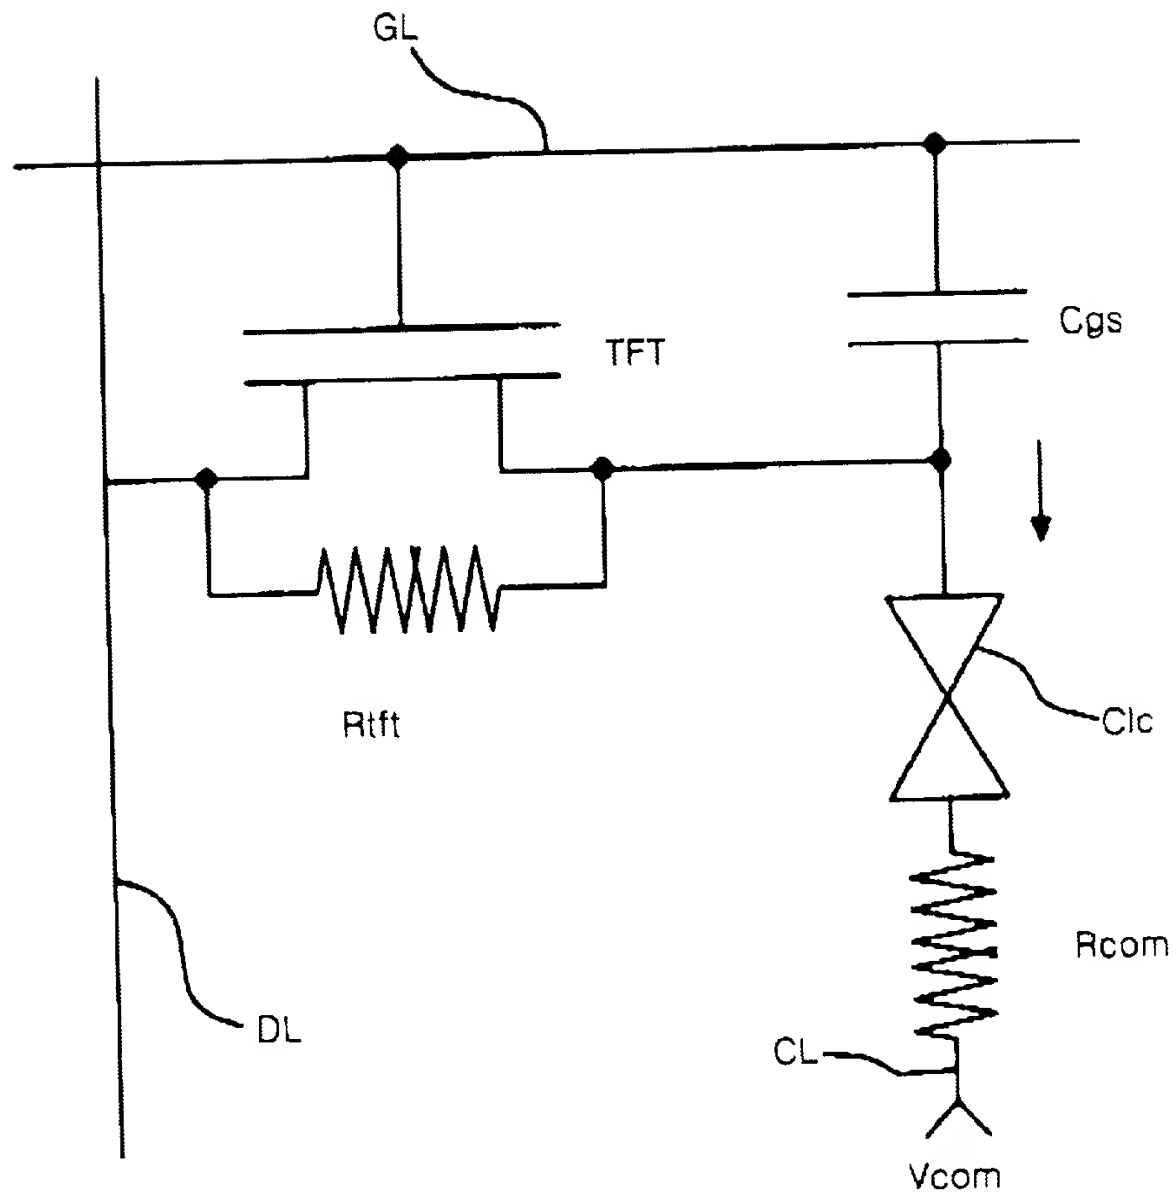
+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+

FIG. 3B  
PRIOR ART

-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-
-	+	-	+	-	+	-	+
+	-	+	-	+	-	+	-

FIG. 3A

FIG. 4  
PRIOR ART





12


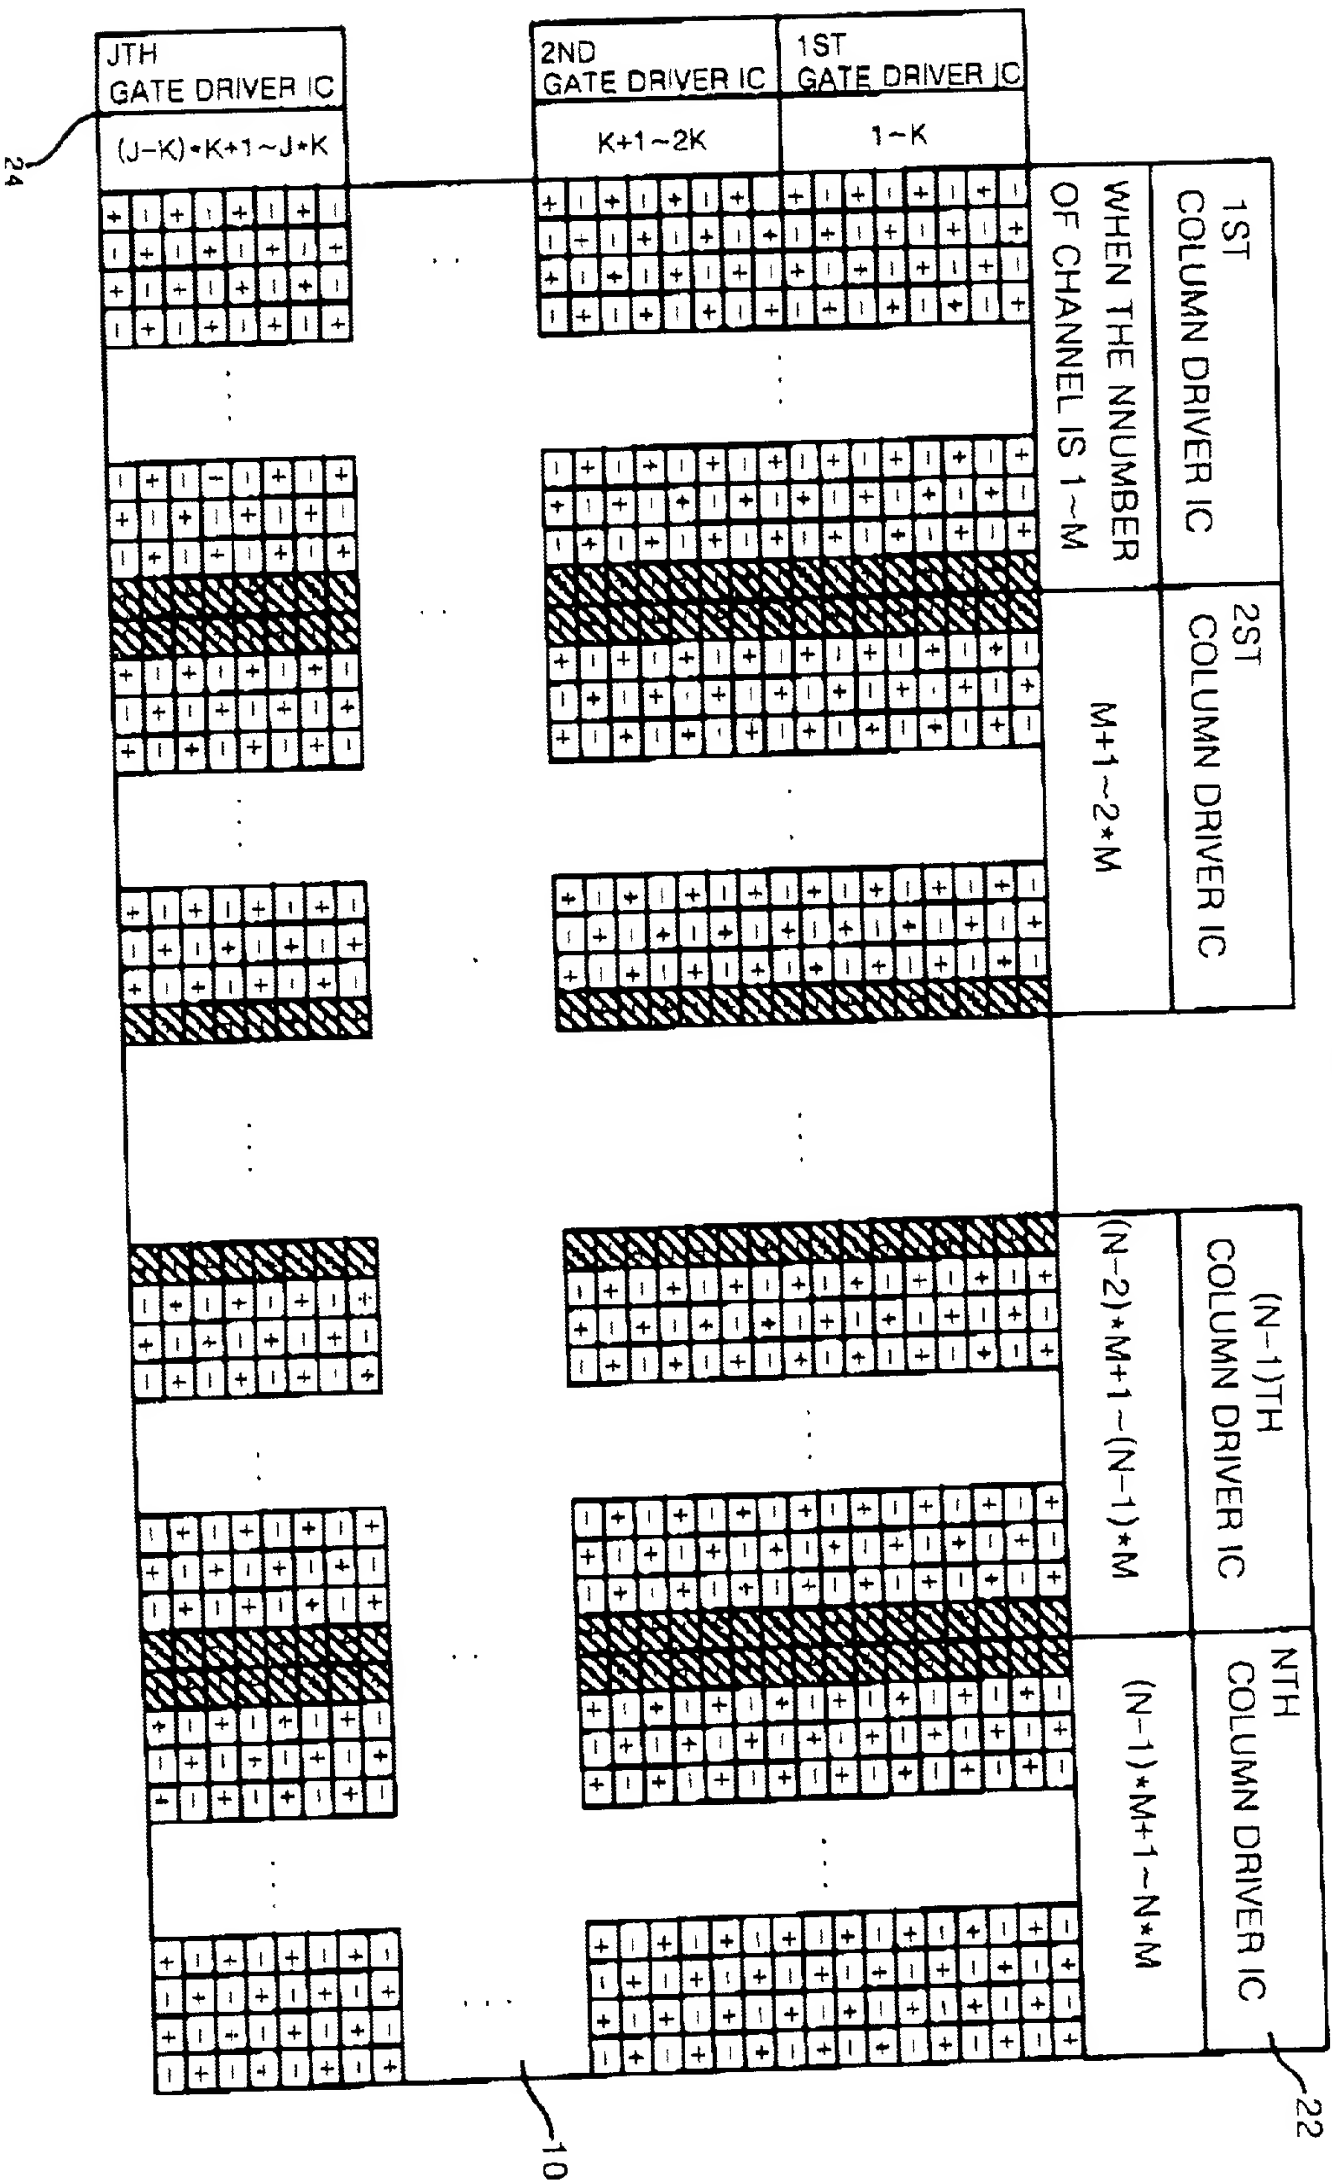
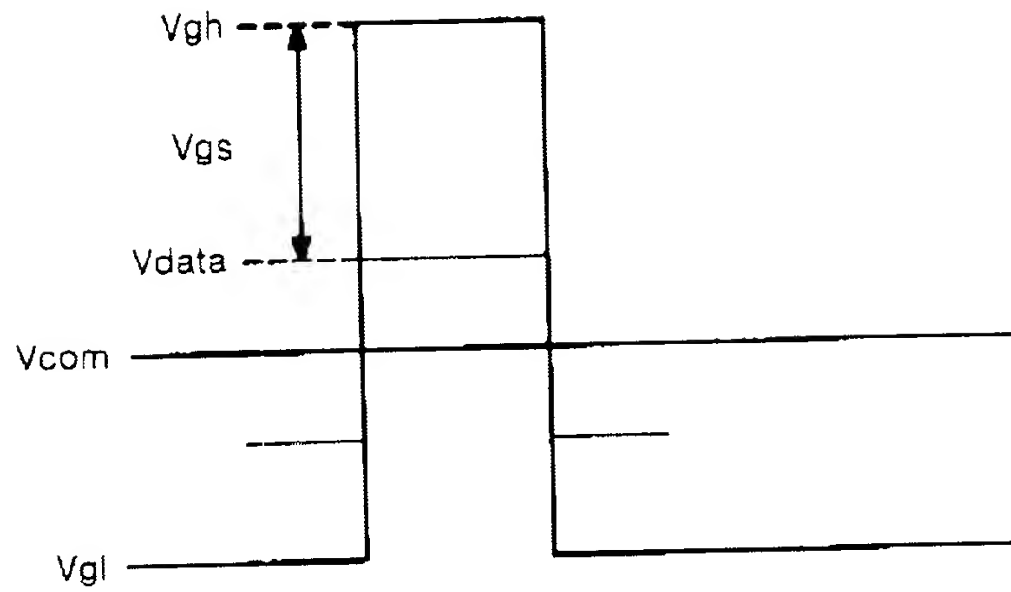


FIG. 5B  
PRIOR ART



2000-SEP-01 21:12 FROM:Y.H.KIM IPTL

# FIG.6A



# FIG.6B

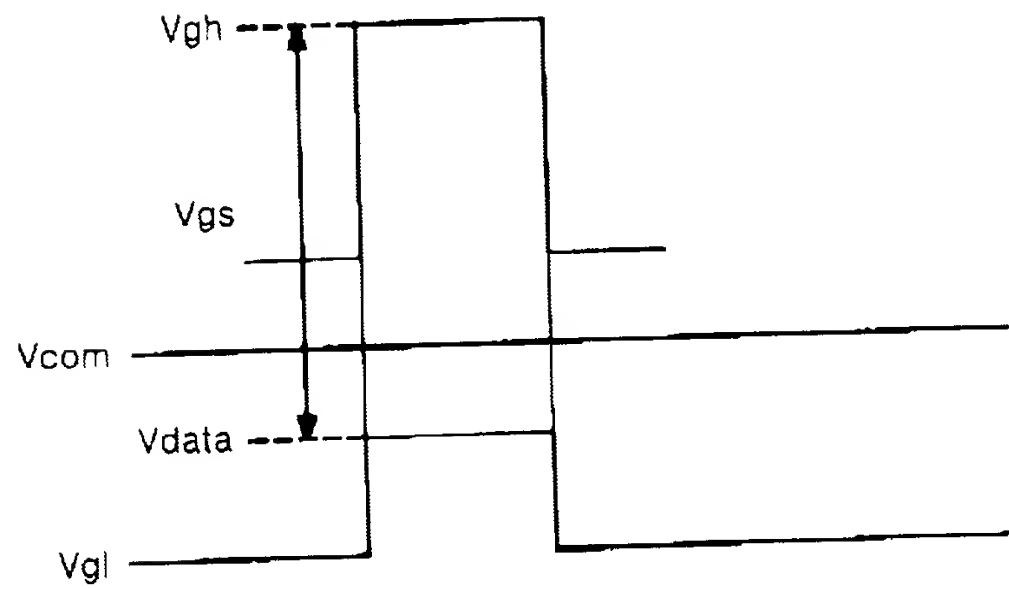


FIG. 7A  
PRIOR ART

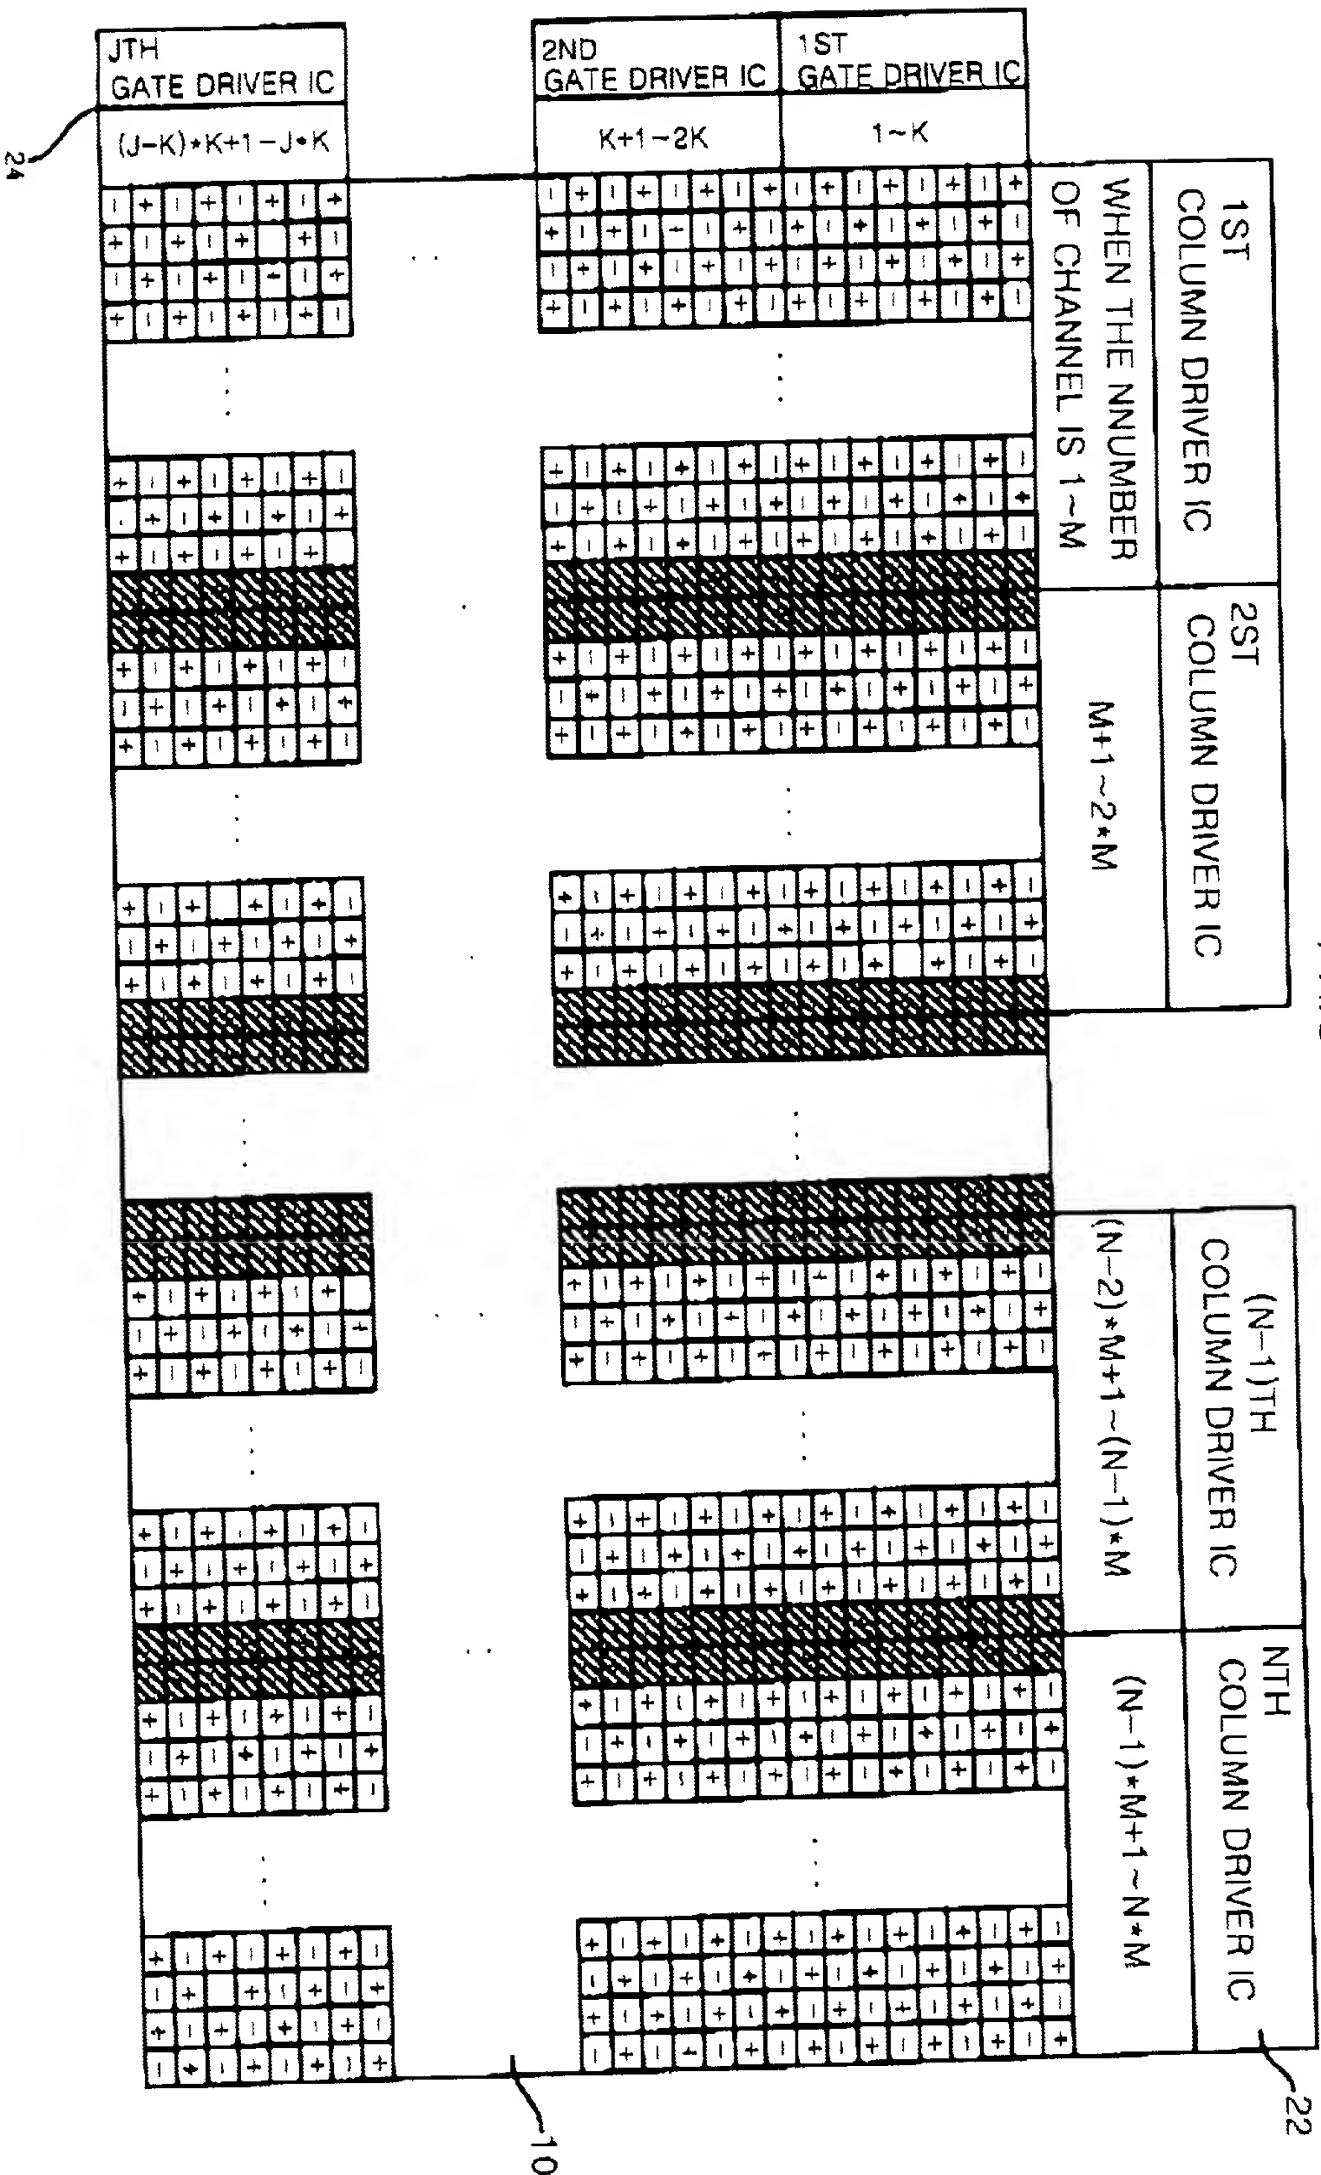


FIG. 7B

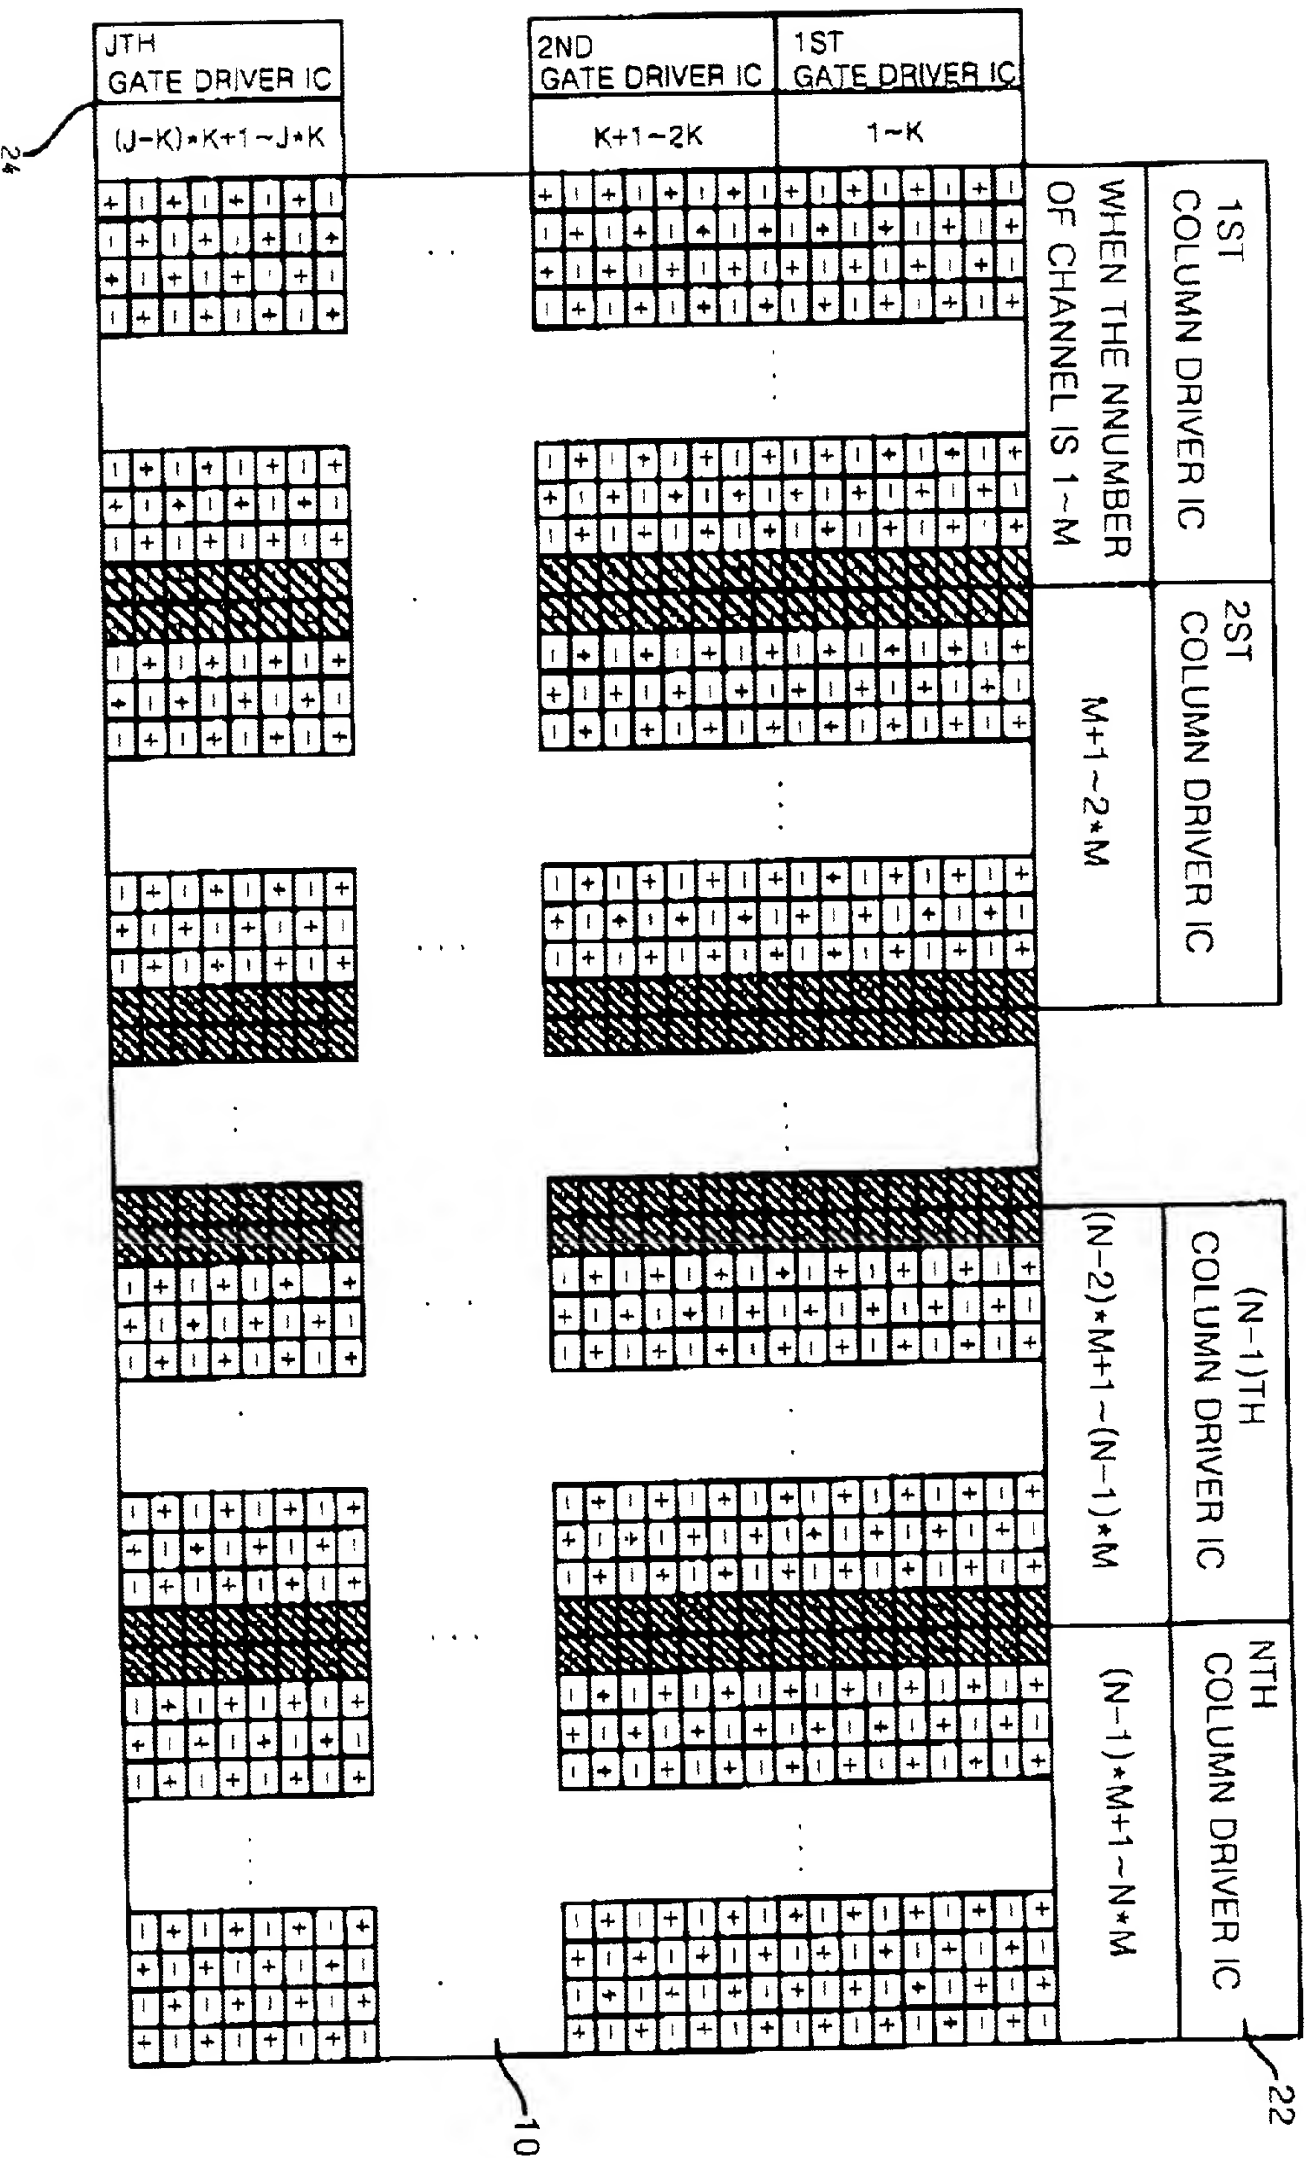
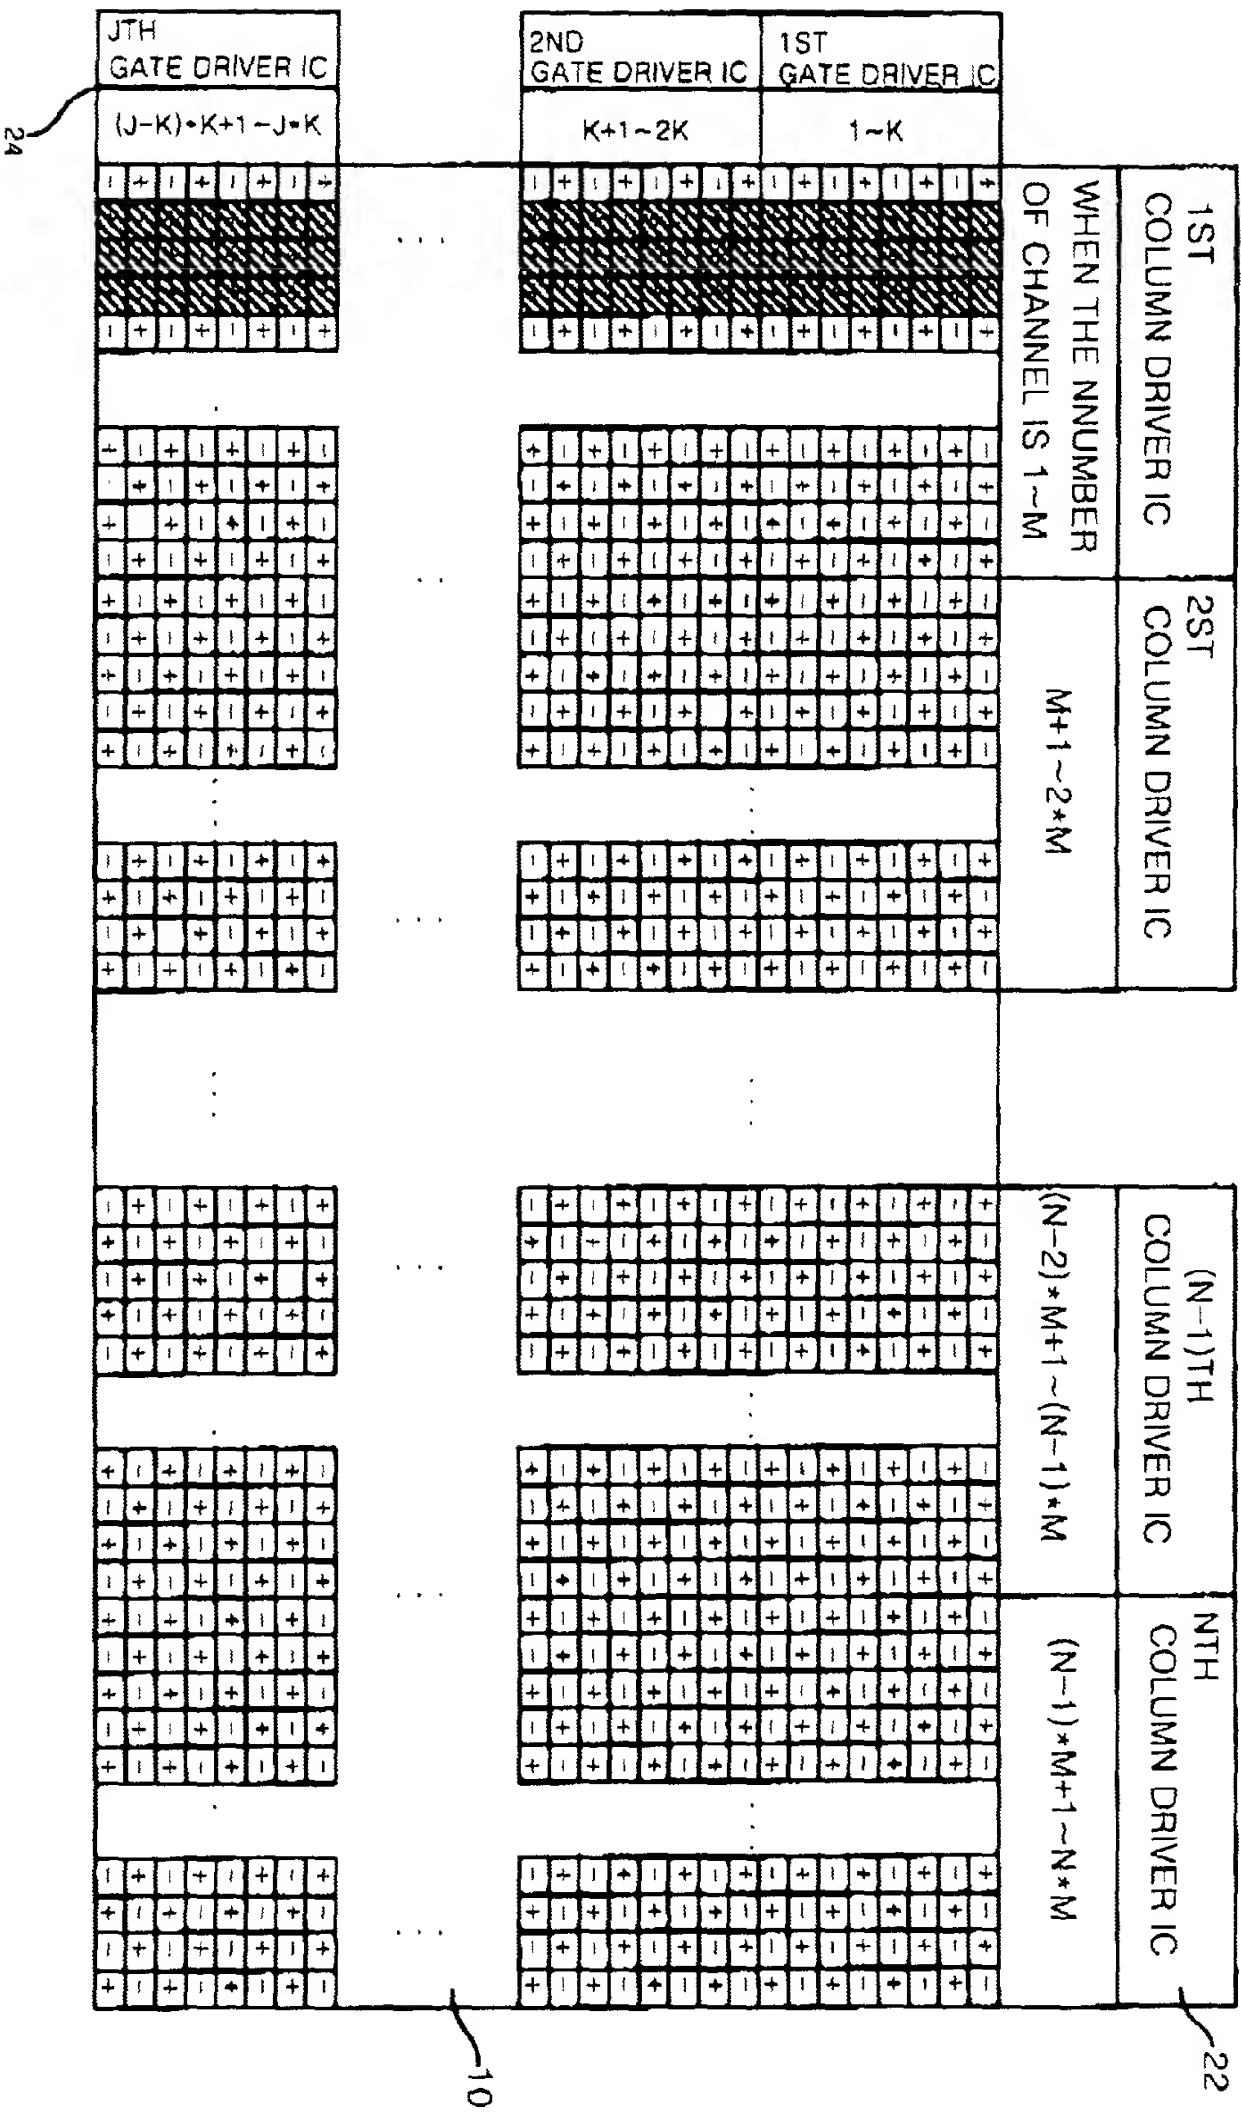


FIG. 8A
























JTH GATE DRIVER IC (J-K) * K+1 ~ J * K	2ND GATE DRIVER IC K+1 ~ 2K	1ST GATE DRIVER IC 1 ~ K	WHEN THE NUMBER OF CHANNEL IS 1 ~ M	1ST COLUMN DRIVER IC	2ST COLUMN DRIVER IC	(N-1)TH COLUMN DRIVER IC	NTH COLUMN DRIVER IC
				M+1 ~ 2 * M	(N-2) * M+1 ~ (N-1) * M		
  	  	  		  	  	  	  

FIG. 9

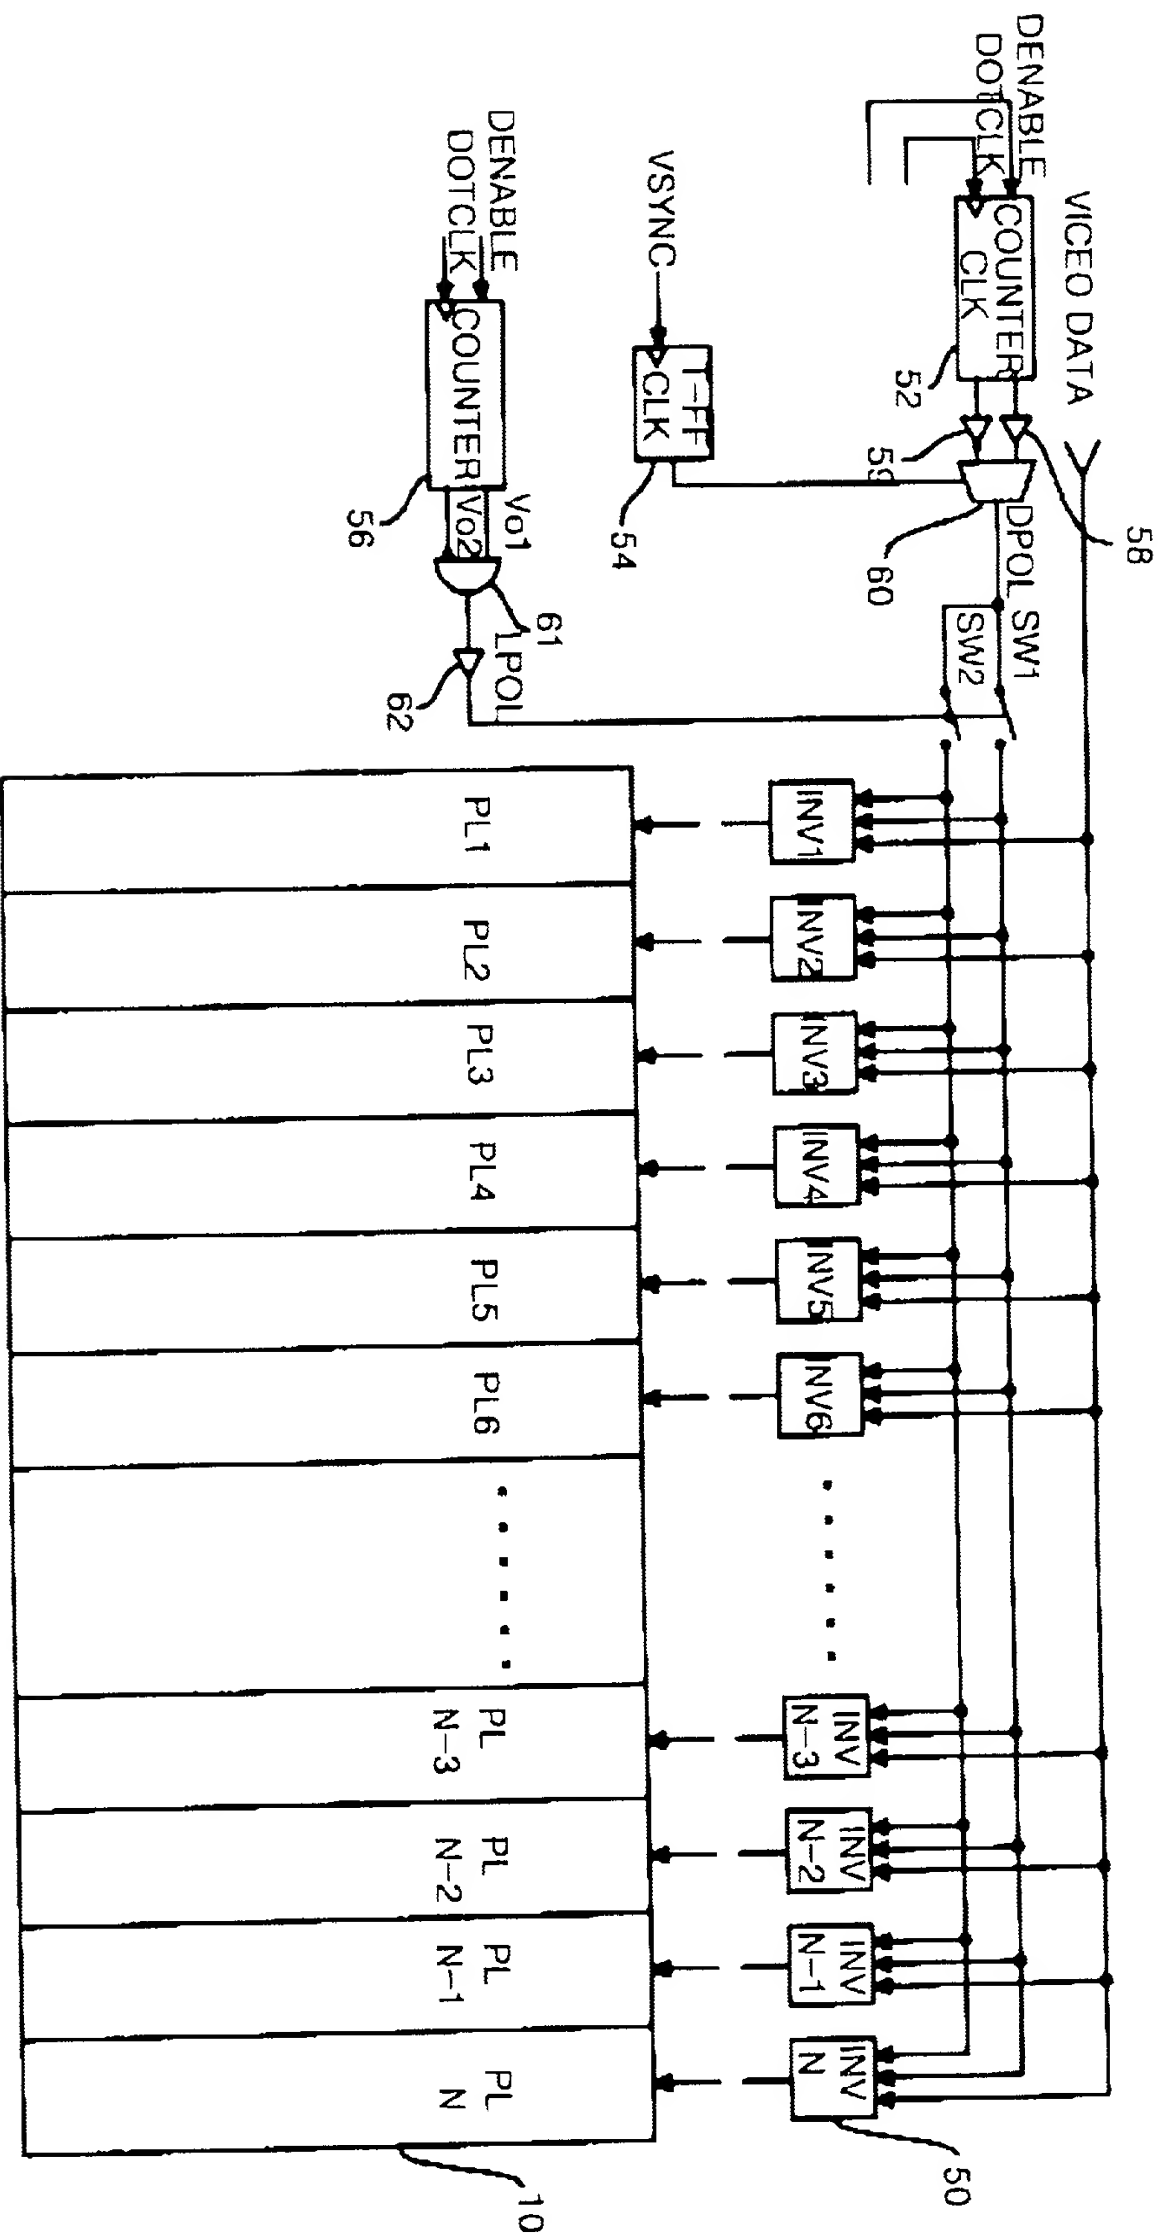




FIG.10

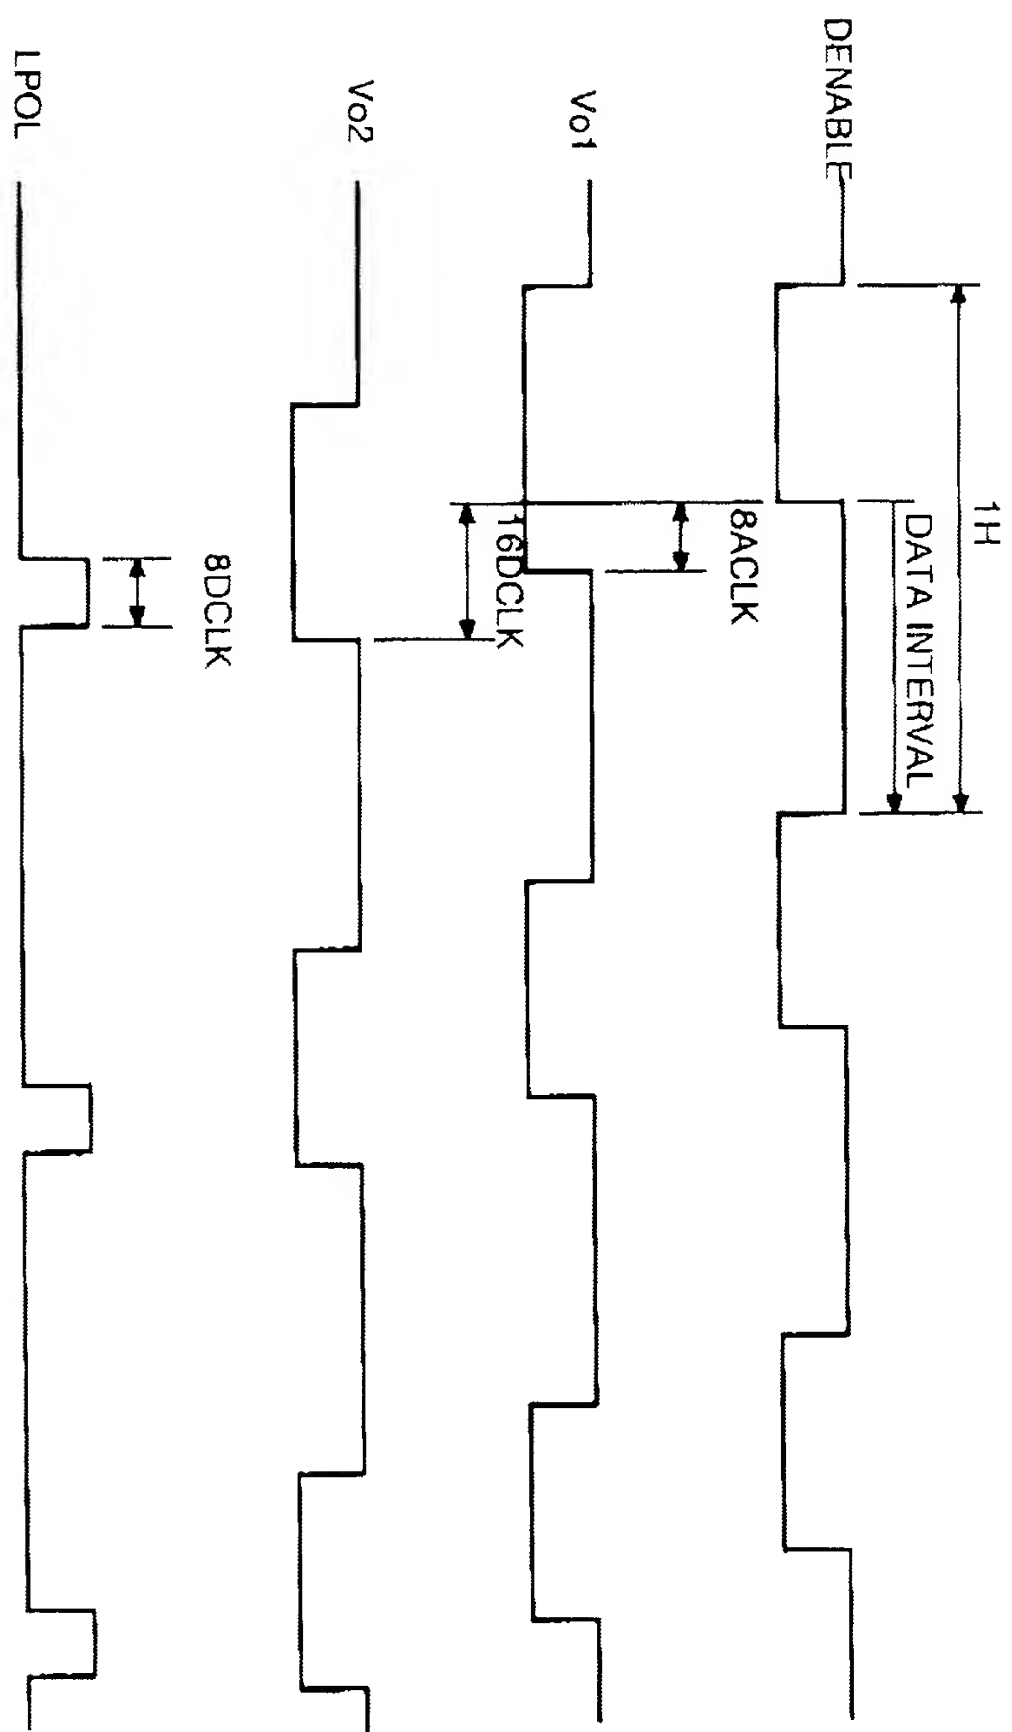
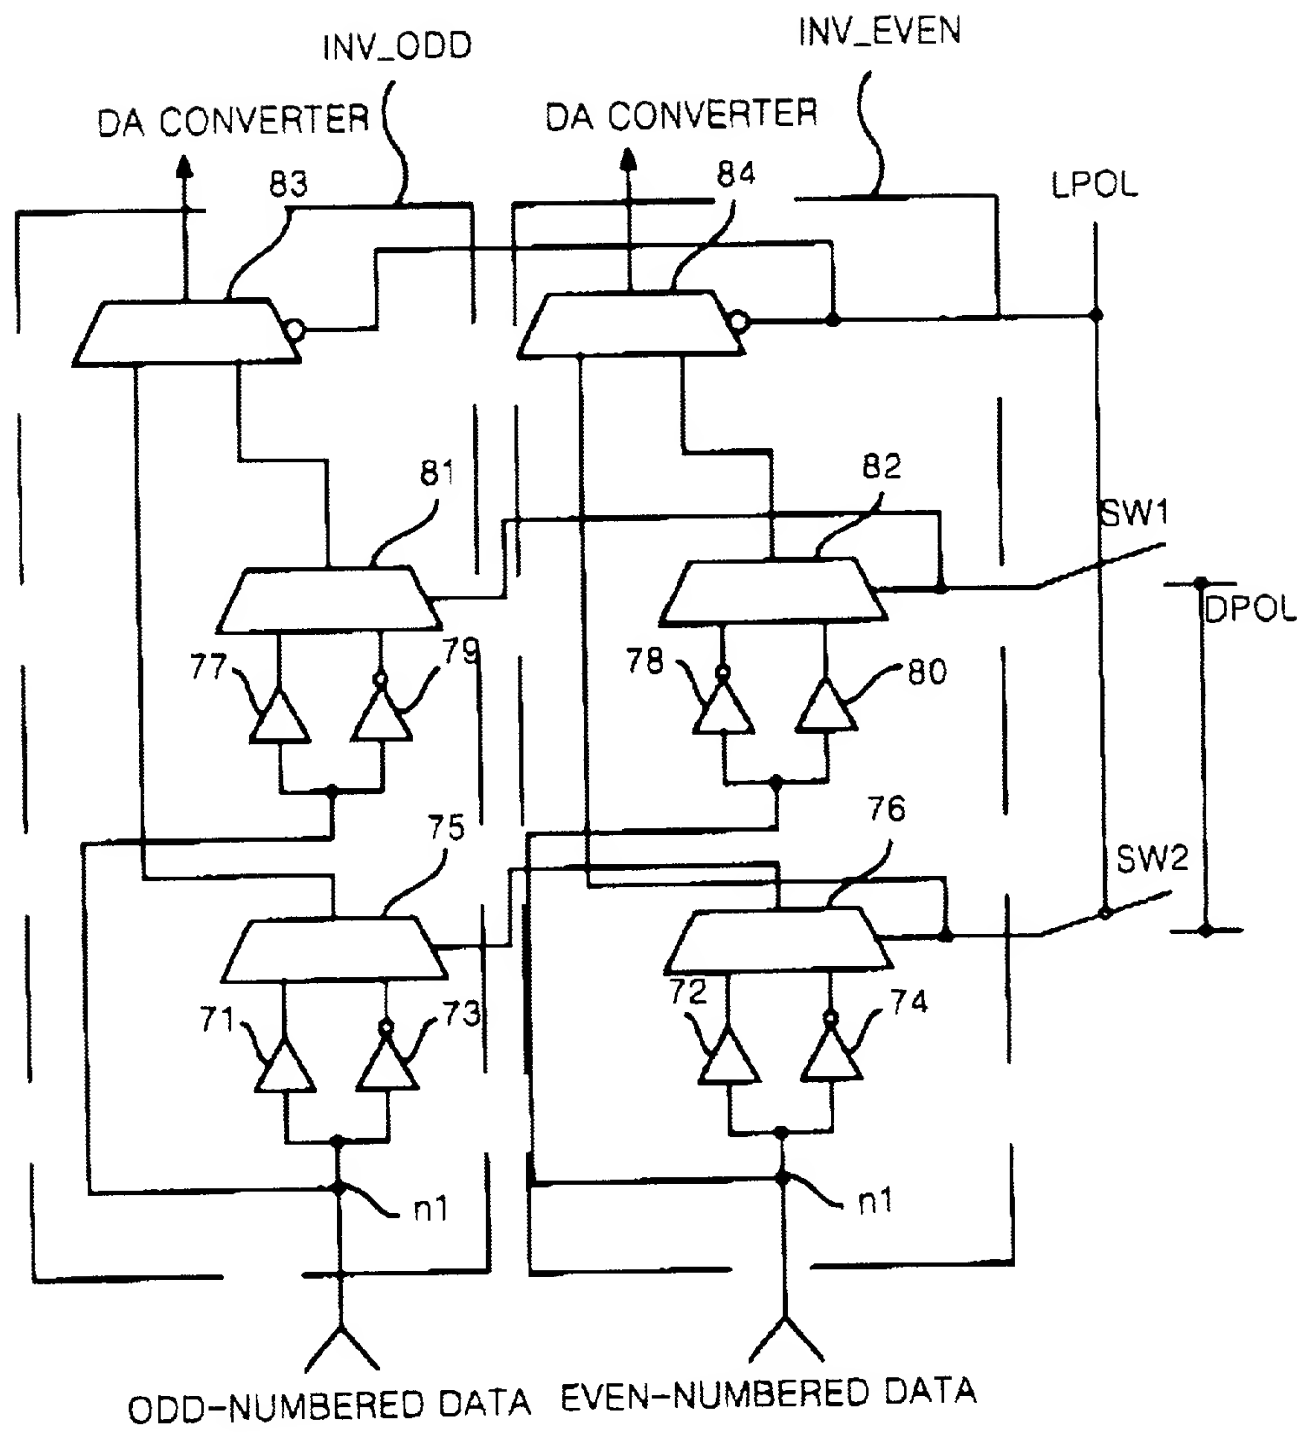


FIG.11



Docket No. 8733.294.00

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

IN RE APPLICATION OF: Seung Kuk AHN

FILING DATE: Herewith

FOR: METHOD AND APPARATUS FOR DRIVING LIQUID CRYSTAL DISPLAY PANEL IN INVERSION

**LIST OF INVENTORS' NAMES AND ADDRESSES**

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

SIR:

Listed below are the names and addresses of the inventors for the above-identified patent application.

Seung Kuk AHN

#907-503, Samwoo Apartment, 219-2, Hyounggok-dong,  
Kumi-shi, Kyongsangbuk-do, Korea

A declaration containing all the necessary information will be submitted at a later date.

Respectfully Submitted,

LONG ALDRIDGE & NORMAN LLP

  
Song K. Jung

Registration No. 35,210

Sixth Floor  
701 Pennsylvania Avenue, N W  
Washington, D.C. 20004  
Tel. (202) 624-1200  
Fax. (202) 624-1298

Date: September 1, 2000